



Dixon Bayco UL Listed Petroleum Nozzles

Truck Refueling - Automatic Shut-Off Nozzle 




- for card lock and truck refueling stations
- venturi type automatic shut-off requires minimum 29 liters per minute flow (7.5 US GPM)
- rated up to 50 PSI, and 300 liters per minute flow (80 US GPM)
- detachable trigger ratchet
- heavy duty aluminum construction with bronze trigger
- break away aluminum spout is field replaceable
- UL Listed

Part #	Description
AN125	1-1/4" FNPT inlet x 1-3/8" spout
AN150	1-1/2" FNPT inlet x 1-3/8" spout
AN-RK1	replacement spout kit
AN-RK2	replacement ratchet kit
AN-RK3	replacement trigger kit

NOTE: Some fuel additives may not be compatible with seal materials.
Please contact Dixon Bayco for fuel compatibility.

900 Series Utility Nozzle

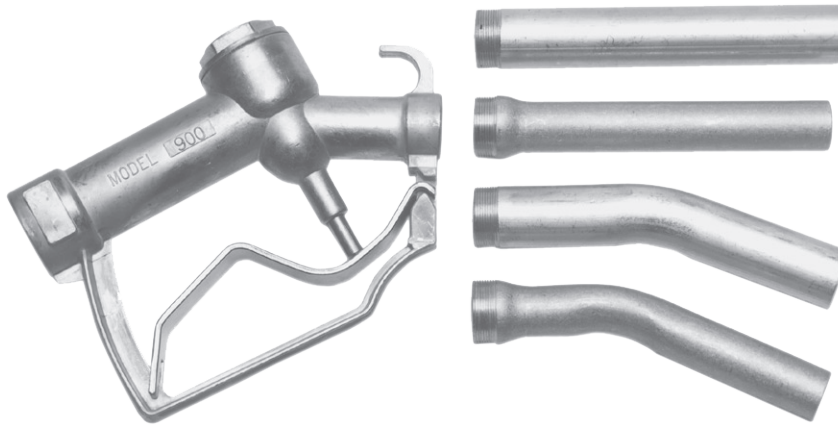

- Commonly used for dispensing fuel at construction sites, farming and portable truck mounted utility tanks.
- can be used with gravity flow, or pumps up to 25 PSI
- die cast zinc body; with a choice of inlet and spout sizes
- UL Listed

Part #	Inlet Size	Description
900	1" FNPT	1" Female 24UNS threaded outlet (no spout)
900S	1" FNPT	1" straight spout
900B	1" FNPT	1" bent spout
900W34S	1" FNPT	3/4" straight spout
900W34B	1" FNPT	3/4" bent spout
900S34 *	3/4" FNPT	3/4" straight spout
900B34 *	3/4" FNPT	3/4" bent spout

* 3/4" Inlet versions use 1"x 3/4" reducing bushing to adapt inlet to 3/4" FNPT

NOTE: Some fuel additives may not be compatible with seal materials. Please contact Dixon Bayco for fuel compatibility.

Dixon Bayco

800 High Street • Chestertown, MD 21620
phone: 410.778.2000 • fax: 410.778.4702
Toll-Free 877-963-4966



The Right Connection™

Dixon Bayco Limited

2315 Bowman Street, Innisfil, ON L9S 3V6
Phone: 705-436-1125 • Toll-Free 877-963-4966
Fax: 877-436-6251

7011 68th Avenue, Edmonton, AB T6B 3E3
Phone: 780-469-5444 • Toll-Free 877-963-4966
Fax: 877-463-9205

536 Avenue Lepine, Dorval, QC H9P 2V6
Phone: 514-422-9292 • Toll-Free 877-963-4966
Fax: 866-422-0166