




The Right Connection™

Dixon Industrial Hose

A101R - General Purpose Red

Dixon A101R general purpose hose is suitable for Air or Water service in a wide variety of applications, including but not limited to: Construction sites, Industrial facilities, Factories, Maintenance departments, Mining, Automotive repair facilities, and Agricultural use.

Application: Air or Water delivery, where oil is not considered a significant factor.

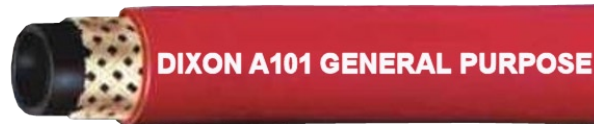

Hose Construction

Inner Tube: Black extruded NR/SBR blend

Reinforcement: High strength polyester braid

Outer Cover: Red extruded SBR/EPDM blend. Offers excellent abrasion, ozone and UV resistance.

Branding: White lettering: "DIXON A101 GENERAL PURPOSE 200 PSI WP {Size}. DIXON HOSE ASSEMBLY W.P.____"

Working Pressure: 200 PSI at a safety factor of 3:1

Temperature Rating: -25°C to 100°C (-13°F to 212°F)

Part #	ID inches	OD inches	Working Pressure (PSI)	Weight (lbs per ft)	Packing
A101R006	1/4	0.53	200	0.12	500ft./reel
A101R010	3/8	0.68	200	0.16	500ft./reel
A101R012	1/2	0.83	200	0.25	500ft./reel
A101R020	3/4	1.16	200	0.40	600ft./reel *
A101R025	1	1.38	200	0.50	600ft./reel *
A101R032	1-1/4	1.73	200	0.77	100ft./coil
A101R038	1-1/2	2.09	200	1.15	100ft./coil
A101R050	2	2.60	200	1.57	100ft./coil

* reel length is made up of 2 x 300 ft. lengths

A102XP X-High Pressure Contractors Yellow Air

Dixon A102XP Contractors hose is suitable for air or water service in a wide variety of applications, including but not limited to: Construction sites, Industrial facilities, Factories, Maintenance departments, Mining, and Agricultural use. Conforms to standards BS5118:2 & EN2398

Application: Air or Water delivery.



Hose Construction

Inner Tube: Black extruded NR/SBR blend, suitable for service with air tool lubricators (oil mist service)

Reinforcement: High strength polyester braid

Outer Cover: Yellow extruded SBR/EPDM blend. Offers excellent abrasion, ozone and UV resistance.

Branding: Black lettering: "DIXON A102 CONTRACTORS AIR HOSE 400 PSI WP {Size}. DIXON HOSE ASSEMBLY W.P.____"

Working Pressure: 400 PSI at a safety factor of 3:1

Temperature Rating: -25°C to 75°C (-13°F to 167°F)

Part #	ID inches	OD inches	Working Pressure (PSI)	Weight (lbs per ft)	Packing
A102XP012	1/2	0.83	400	0.26	500ft./reel
A102XP020	3/4	1.14	400	0.43	600ft./reel *
A102XP025	1	1.42	400	0.59	600ft./reel *

* reel length is made up of 2 x 300 ft. lengths

Dixon Bayco Limited

2315 Bowman Street, Innisfil, ON L9S 3V6
Phone: 705-436-1125 • Toll-Free 877-963-4966
Fax: 877-436-6251

536 Avenue Lepine, Dorval, QC H9P 2V6
Phone: 514-422-9292 • Toll-Free 877-963-4966
Fax: 866-422-0166

7011 68th Avenue, Edmonton, AB T6B 3E3
Phone: 780-469-5444 • Toll-Free 877-963-4966
Fax: 877-463-9205